

CCE1**Precise and stable cut with minimal weight****Classic model - Ø Maxi 20mm**

- Long-sleeved
- Precise cut with maximum stability and minimum weight
- Capacity: 120mm² Cu/Al cable (max. diameter 20mm)
- Weight : 1kg
- Size : 36 cm

Code CCE1**For copper, aluminum and multi-fiber cables - NOT SUITABLE FOR STEEL AND STAINLESS STEEL CABLES****CCE2****Classic model - Ø Maxi 31mm**

- Capacity: Cu/Al 250mm²
- Telecom 56x2 9/10° / U-1000(A)R2V 1x300mm²
- Three-phase underground connection 3x50 + 50mm²
- Weight : 1,4 kg
- Size : 53 cm

Code CCE2**For copper, aluminum and multi-fiber cables - NOT SUITABLE FOR STEEL AND STAINLESS STEEL CABLES****CCE3****Classic model - Ø50mm max**

- Long-sleeved
- Precise cut with maximum stability and minimum weight
- Capacity: Cu/Al 500mm²
- Tripol twist. 3x240mm² / Aérien 3x150+70+2x16mm² U-1000(A)R2V 3x185+70mm²
- Weight : 2.9kg
- Size : 77 cm

Code CCE3**For copper, aluminum and multi-fiber cables - NOT SUITABLE FOR STEEL AND STAINLESS STEEL CABLES****Cutting pliers**


- Spring-loaded automatic opening
- Secure push button closure
- Ø maxi 20 mm
- Attached by a chain
- Size : 0.5 kg

Code E3400006

SCZ 55

- Cutting capacity :
- Cu/Al up to a maximum diameter of 55 mm
- Al 500 mm² et Cu 450 mm²
- Weight : 0.9 kg
- Size : 29 cm
- Possibility of opening the knives in all positions
- Manufacturer's after-sales service / each part is interchangeable / spare parts in stock

Code **CCSCZ5**

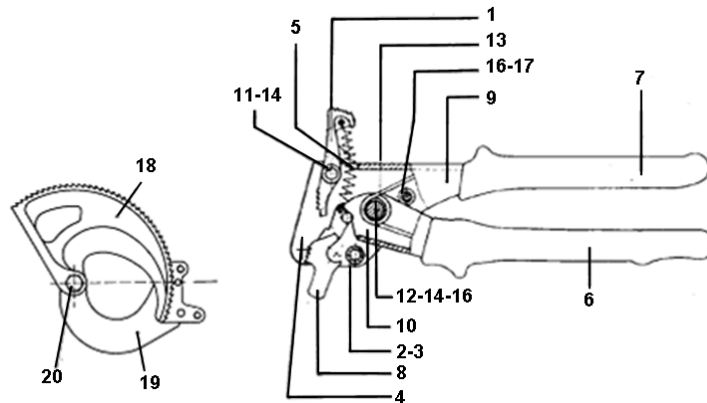

Number	Désignation	Number	Désignation	Number	Désignation
1	Stopper	8	Push button with closure	15	Washer
2	Hex head screw	9	Large handle	16	Main screw
3	Spacer	10	Small handle	17	Socket
4	CHC F/90 countersunk	11	Stopper axle	18	Segment jaw
5	Stop spring	12	Eccentric axle	19	Fixed jaw
6	Handle scabbard	13	Spring	20	Knife screws
7	Handle scabbard	14	Hex nut	-	-

HC 55

These cable cutters are all available in normal version and insulated version

Code **CCHC55**

Model	Ø maxi	Capacity	Weight	Size	Code
HC 32	32 mm	Special unipolar armored copper cable Cu 1 x 250mm ²	1.1 kg	41 cm	CCHC32
HC 38	38 mm	Al 300mm ² - Cu 240mm ² Twist 3x70+70+2x16mm ²	1.1 kg	41 cm	CCHC38
HC 46	46 mm	Special single-core copper cables (rigid) Cu 1 x 380mm ²	1.3 kg	43 cm	CCHC46
HC 55	55 mm	Al 500mm ² - Cu 450mm ² 1 x 450mm ² / 3 x 180mm ² / 4 x 120mm ² Underground 3 x 240mm ² + 95mm ²	1.8 kg	43 cm	CCHC55
HC 58	58 mm	Al 500mm ² - Cu 450mm ² THT 1 x 300mm ² / HTA 3 x 185mm ² BT H07RN-F 4x 120mm ²	1.3 kg	43 cm	CCHC58
HC 92	92 mm	Al 1000mm ² - Cu 850mm ² 1 x 1000mm ² HTB : 1 x 400mm ² - HTA 3 x 95mm ²	3.9 kg	63 cm	CCHC92

